



Reliability Since 1921

Increase your product yield and make tasty, flavorful, value-added products with the BIRO Model VTS-100 or Model VTS-500 Vacuum Tumblers. Both Tumblers have a $\frac{3}{4}$ HP vacuum pump motor that can evacuate the drum chamber quickly. The three stage timer on the VTS-500 lets you program relax time into your tumbling cycle for products such as hams or bellies. The Run/jog controls let you position the drum for easy cleaning or unloading. Heavy duty casters let you do your tumbling virtually anywhere in your plant. The drain hole in the drum makes cleanup a snap. Improve your profit margin with value-added products from the BIRO VTS-100 or the VTS-500 Vacuum Marinating Tumblers.



Model VTS-100



Optional- VTS-100/500
Quick Access Hinged
Control Panel Enclosure -
Recommended in high
pressure wash
environments.




Model VTS-500


VTS-100 / 500

MODEL SPECIFICATIONS

Model VTS-100

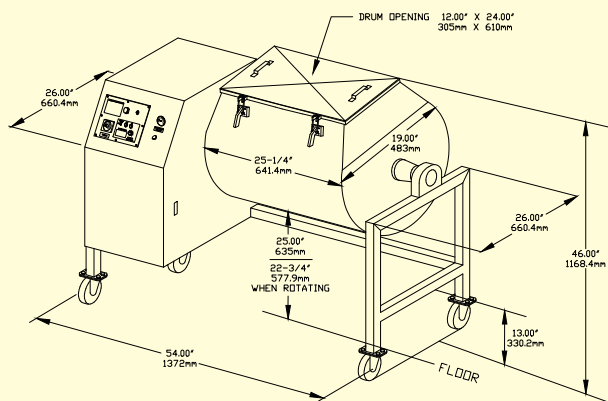

Model VTS-500

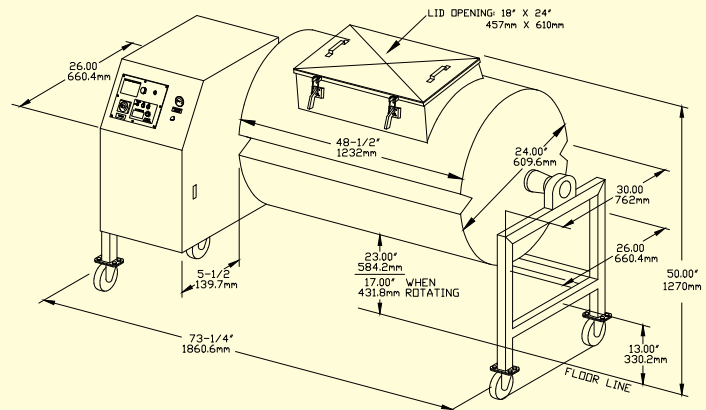

Models	VTS-100 Vacuum Marinating Tumbler					VTS-500 Vacuum Marinating Tumbler				
Electrical	115 Volts, 60 Cycle, 1 Phase has 8' Cord and Plug; 220Volts, 50/60 Cycle, 1 Phase has 8' Cord, No Plug.									
Construction	Stainless steel drum and frame.									
Motors	Controls are NEMA 4X rated									
	MOTOR	HP	TYPE	KW	VOLTS	AMPS	HERTZ	PH	CODE	EC = Extra Cost STD = Standard OPDP = Open Drip Proof TEFC = Totally Enclosed Fan Cooled
	DRIVE	¾	TEFC	.56	115/230	12/6	60	1	STD	
	PUMP	¾	OPDP	.56	115/230	12/6	60	1	STD	
	DRIVE	¾	TEFC	.56	220	7.6	50	1	EC	
	PUMP	¾	OPDP	.56	220	5.0	50	1	EC	
Drum Capacity	100 lbs. (45.4 kg) Maximum 100 lbs. (45.4 kg) Approximate, Optimum tumbling load.					500 lbs. (227 kg) Maximum 440 lbs. (199 kg) Approximate, Optimum tumbling load.				
Dump Height Less Lid	30" (762mm), Drum opening at 9 O'clock position. 25.75" (654mm), Drum opening at 6 O'clock position.					24" (609mm), Drum opening at 9 O'clock position. 21.125" (536.6mm), Drum opening at 6 O'clock position.				
Drive Motor	¾ HP (.56kw) DC, Variable speed (0-14 RPM), 60:1 Transmission, TEFC (Totally Enclosed Fan Cooled).									
Vacuum Pump	¾ HP (.56kw), 60 cycle, 1 phase - 10 CFM - Rotary vane type									
Timer	0-50 Minute, Interval mode timer (dial).					0-999 Min., Programmable multi-function timer w/ Time inhibit.				
Tumble Speed	0 - 14 RPM									
Safety Standard	Photoelectric eye, for safety shut down.									
Standard Features	5" Locking swivel casters • Drain cap wrench • External moisture trap with removal tool • Internal in-line vacuum filter • 1 Extra filter element • 8' cord and plug 115V • 8' cord NO plug 220V • 4 Quick release toggle clamps on lid • Silicone lid gasket • Operating and Safety manual.									
Options (EC)	220-50-1 or 230-60-1 • Leg extensions • Stainless steel swivel locking (delrin bearing) casters with stainless steel (swivel plate) ball bearings • Reverse switch momentary • Programmable multi-function timer • Stainless steel crimped fittings on hose • Protective enclosure for control panel.					220-50-1 or 230-60-1 • Leg extensions • Stainless steel swivel locking (delrin bearing) casters with stainless steel (swivel plate) ball bearings • Reverse switch momentary • Stainless steel crimped fittings on hose • Protective enclosure for control panel.				
Certifications	N.S.F.					U.L. (115V - 60 Hz Only) & N.S.F.				
Weight	Uncrated: 468 lbs. (212 kg) Approximate Crated: 711 lbs. (323 kg) Approximate					Uncrated: 645 lbs. (293 kg) Approximate Crated: 990 lbs. (449 kg) Approximate				
Dimensions Crated	L = 72" (1829mm) x W = 42" (1067mm) x H = 53" (1346mm).					L = 96" (2438mm) x W = 42" (1067mm) x H = 57" (1448mm).				
Allowable Workspace	A required minimum distance of 12" from back of machine to nearest object must be maintained for rotating drum.									

BIRO MANUFACTURING COMPANY
1114 WEST MAIN STREET
MARBLEHEAD, OH 43440-2099 U.S.A.
Phone: (419) 798-4451 • Fax: (419) 798-9106
www.birosaw.com • sales@birosaw.com

ITEM NO.: LIT-VTS-100/500-328
 FORM NO.: Md VTS-100/500-328-2-24-6

All specifications contained herein are subject to change without notification.

Service is available from locations worldwide